TM 11-5820-358-20P

TECHNICAL MANUAL

ORGANIZATIONAL MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST

FOR

RADIO RECEIVER R-390A/URR (NSN 5820-00-538-7555)

Distribution authorized to the Department of Defense and DOD contractors only for official use or for administration or operational purposes. This determination was made on 9 January 1989. Other requests for this document will be referred to Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-LC-ME-P, Fort Monmouth, NJ 07703-5000.

DESTRUCTION NOTICE—Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

HEADQUARTERS, DEPARTMENT OF THE ARMY
1 AUGUST 1990

Technical Manual
No. 11-5820-358-20P

HEADQUARTERS
DEPARTMENT OF THE ARMY
Washington, DC, 1 August 1990

ORGANIZATIONAL MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST FOR RADIO RECEIVER R-390A/URR (NSN 5820-00-538-7555)

Current as of 24 May 1990

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS

You can help improve this manual. If you find any mistakes or if you know of a way to improve the procedures, please let us know. Mail your letter, DA Form 2028 (Recommended Changes to Publications and Blank Forms), or DA Form 2028-2 located in back of this manual direct to: Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-LC-ME-PS, Fort Monmouth, New Jersey 07703-5000.

In either case, a reply will be furnished direct to you.

Table of Contents

			Page	Illus Figure
Section	I.	Introduction	1	
	II.	Repair Parts List	1-1	
Group	00	Radio Receiver R-390A/URR	1-1	1
	01	Receiver Assembly (A1)	2-1	2
		0101 Audio Assembly (AF Subchassis)	3-1	3
		0102 Amplifier Subassembly (A1A3)	4-1	4
		0103 Amplifier, Radio Frequency (RF Subchassis) (A1A7)	5-1	5
		0104 Oscillator Assembly (Crystal-Oscillator Subchassis) (A1A8)	7-1	7
		0105 Gear Assembly (RF Gear Train) (A1A9) (No parts authorized)		
		0106 Power Supply (Power Supply Subchassis) (A1A5)	11-1	11
		0107 Radio Frequency (VFO Subchassis) (A1A6) (No parts authorized)		
		0108 Panel Assembly, Front (A1A34) (No parts authorized)		
		0109 Panel Assembly (Chassis) (A1A37)	13-1	13

*This manual supersedes TM 11-5820-358-20P, 2 December 1977

Table of Contents - Continued

			Page	Illus Figure
Section	III.	Special Tools List (Not applicable)		
	IV.	Cross-Reference Indexes		
		National Stock Number Index.....	I-1	
		Part Number Index.....	I-2	
		Figure and Item Number Index.....	I-3	

SECTION I
INTRODUCTION

1. Scope

This manual lists and authorizes spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE); and other special support equipment required for performance of organizational maintenance of the R-90A/URR. It authorizes the requisitioning, issue, and disposition of spares, repair parts, and special tools as indicated by the source, maintenance and recoverability (SMR) codes.

2. General

This Repair Parts and Special Tools List is divided into the following sections:

a. Section II. Repair Parts List. A list of spares and repair parts authorized by this RPSTL for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in ascending numeric sequence, with the parts in each group listed in ascending item number sequence. Figure numbers are listed directly beneath the group header. Items listed are shown on the associated illustration.

b. Section III. Special Tools List. Not applicable.

c. Section IV. Cross-Reference Indexes. A list, in National item identification number (NIIN) sequence, of all National stock numbered items appearing in the listing, followed by a list in alphameric sequence of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance. The figure number and item number index lists figure and item numbers in numeric sequence and cross-references National stock number, Commercial and Government Entity Code and part numbers.

3. Explanation of Columns (Section II and III)

a. Item No. (Column (1)). Indicates the number used to identify items called out in the illustration.

b. SMR Code (Column (2)). The source, maintenance, and recoverability (SMR) code is a five-position code containing supply/requisitioning information, maintenance category authorization criteria, and disposition instructions, as shown in the following breakout:

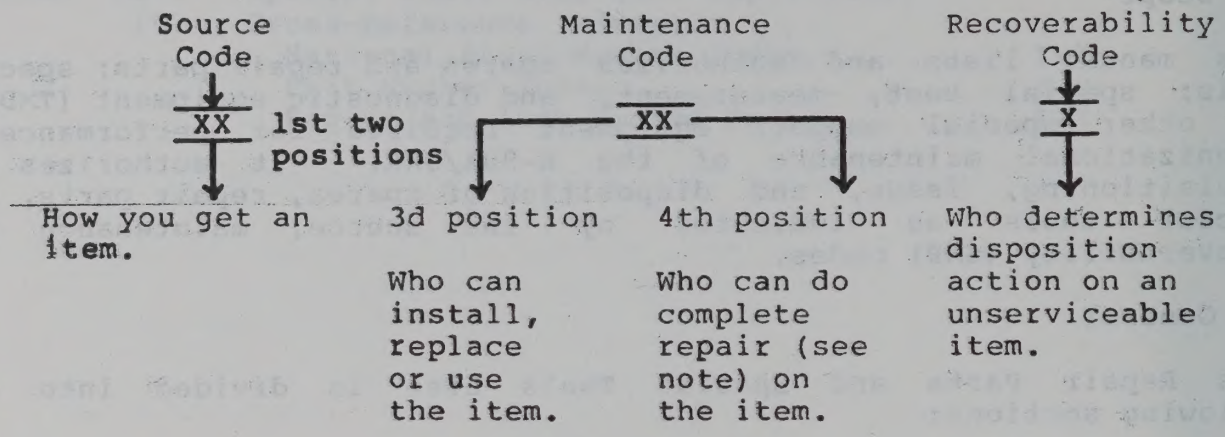

NOTE

Complete repair: Maintenance capacity, capability, and authority to perform all corrective maintenance tasks of the "repair" function in a use/user environment in order to restore serviceability to a failed item.

(1) Source code. The source code tells you how to get an item needed for maintenance, repair, or overhaul of an end item/equipment. Explanations of source codes follows:

Code	Explanation
PA, PB, PC, PD, PE, PF, PG	Stocked items: use the applicable NSN to request/requisition items with these source codes. They are authorized to the category indicated by the code entered in the third position of the SMR code.
	NOTE Items coded PC are subject to deterioration.
KD, KF, KB	Items with these codes are not to be requested/requisitioned individually. They are part of a kit which is authorized to the maintenance category indicated in the third position of the SMR code. The complete kit must be requistioned and applied.

Code	Explanation
MO - Made at org/AVUM category MF - Made at DS/AVIM category MH - Made at GS category ML - Made at Specialized Repair Activity (SRA) MD - Made at Depot	Items with these codes are not to be requested/requisitioned individually. They must be made from bulk material which is identified by the part number in the description and usable on code (UOC) column and listed in the Bulk Material group of the repair parts list. If the item is authorized to you by the third position code of the SMR code, but the source code indicates it is made at a higher category, order the item from the higher category of maintenance.
AO - Assembled by org/AVUM category AF - Assembled by DS/AVIM category AH - Assembled by GS category AL - Assembled by SRA AD - Assembled by Depot	Items with these codes are not to be requested/requisitioned individually. The parts that make up the assembled item must be requisitioned or fabricated and assembled at the category of maintenance indicated by the source code. If the third position code of the SMR code authorizes you to replace the item, but the source code indicates the item is assembled at a higher category, order the item from the higher category of maintenance.

Code	Explanation
XA	Do not requisition an "XA" coded item. Order its next higher assembly.
XB	If an "XB" item is not available from salvage, order it using the CAGEC and part number given.
XC	Installation drawing, diagram, instruction sheet, field service drawing, that is identified by manufacturer's part number.
XD	Item is not stocked. Order an "XD" coded item through normal supply channels using the CAGEC and part number given, if no NSN is available.

NOTE

Cannibalization or controlled exchange, when authorized, may be used as a source of supply for items with the above source codes, except for those source coded "XA" or those aircraft support items restricted by requirements of AR 750-1.

(2) Maintenance code. Maintenance codes tell you the category of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the SMR code as follows:

(a) The maintenance code entered in the third position tells you the lowest maintenance category authorized to remove, replace, and use an item. The maintenance code entered in the third position will indicate authorization to one of the following categories of maintenance.

Code	Application/Explanation
C	Crew or operator maintenance done within organizational or aviation maintenance.
O	Organizational or aviation unit category can remove, replace, and use the item.
F	Direct support or aviation intermediate category can remove, replace, and use the item.
H	General support category can remove, replace, and use the item.
L	Specialized repair activity can remove, replace, and use the item.
D	Depot category can remove, replace, and use the item.

(b) The maintenance code entered in the fourth position tells whether or not the item is to be repaired and identifies the lowest maintenance category with the capability to do complete repair (i.e., perform all authorized repair functions). This position will contain one of the following maintenance codes.

NOTE

Some limited repair may be done on the item at a lower category of maintenance, if authorized by the Maintenance Allocation Chart (MAC) and SMR codes.

Code	Application/Explanation
O	Organizational or aviation unit is the lowest category that can do complete repair of the item.
F	Direct support or aviation intermediate is the lowest category that can do complete repair of the item.
H	General support is the lowest category that can do complete repair of the item.
L	Specialized repair activity (designate the specialized repair activity) is the lowest category that can do complete repair of the item.
D	Depot is the lowest category that can do complete repair of the item.

Code	Application/Explanation
Z -	Nonreparable. No repair is authorized.
B -	No repair is authorized. (No parts or special tools are authorized for the maintenance of a "B" coded item.) However, the item may be reconditioned by adjusting, lubricating, etc., at the user category.

(3) Recoverability code. Recoverability codes are assigned to items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the SMR Code as follows:

Recoverability codes	Application/Explanation
Z -	Nonreparable item. When unserviceable, condemn and dispose of the item at the category of maintenance shown in the third position of SMR code.
O -	Reparable item. When uneconomically reparable, condemn and dispose of the item at organizational or aviation unit category.
F -	Reparable item. When uneconomically reparable, condemn and dispose of the item at direct support or aviation intermediate category.
H -	Reparable item. When uneconomically reparable, condemn and dispose of the item at general support category.
D -	Reparable item. When beyond lower category repair capability, return to depot. Condemnation and disposal of item not authorized below depot category.
L -	Reparable item. Condemnation and disposal not authorized below specialized repair activity (SRA).
A -	Item requires special handling or condemnation procedures because of specific reasons (e.g., precious metal content, high dollar value, critical material, or hazardous material). Refer to appropriate manuals/directives for specific instructions.

c. CAGEC (Column (3)). The Commerical and Government Entity Code (CAGEC) is a 5-digit numeric code which is used to identify the manufacturer, distributor, or Government agency, etc., that supplies the item.

d. Part Number (Column (4)). Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

NOTE

When you use an NSN to requisition an item, the item you receive may have a different part number from the part ordered.

e. Description and Usable on Code (UOC) (Column (5)). This column includes the following information.

(1) The Federal item name and, when required, a minimum description to identify the item.

(2) The statement "END OF FIGURE" appears just below the last item description in Column (5) for a given figure in both section II and section III.

f. Qty (Column (6)). Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly. A "V" appearing in this column in lieu of a quantity indicates that the quantity is variable and the quantity may vary from application to application.

4. Explanation of Columns (Section IV)

a. National Stock Number (NSN) Index.

(1) Stock number column. This column lists the NSN by National item identification number (NIIN) sequence. The NIIN consists of the last nine digits of the NSN. When using this column to locate an item, ignore the first four digits of the NSN. When requisitioning items use the complete NSN (13 digits).

(2) Fig. column. This column lists the number of the figure where the item is identified/located. The illustrations are in numerical sequence in sections II and III.

(3) Item column. The item number identifies the item associated with the figure listed in the adjacent Fig. column. This item is also identified by the NSN listed on the same line.

b. Part Number Index. Part numbers in this index are listed by part number in ascending alphameric sequence.

(1) CAGEC column. This column lists the Commercial and Government Entity Code (CAGEC).

(2) Part number column. This column indicates the part number assigned to the item.

(3) Stock number column. This column lists the National stock number for the associated part number and manufacturer identified in the part number and CAGEC columns to the left.

(4) Fig. column. This column lists the number of the figure where the item is identified/located in sections II and III.

(5) Item column. The item number is that number assigned to the item as it appears in the figure referenced in the adjacent figure number column.

c. Figure and Item Number Index.

(1) Fig. column. This column lists the number of the figure where the item is identified/located in sections II and III.

(2) Item column. The item number is that number assigned to the item as it appears in the figure referenced in the adjacent figure number column.

(3) Stock number column. This column lists the National stock number for the item.

(4) CAGEC column. The Commercial and Government Entity Code (CAGEC) is a 5-digit numeric code used to identify the manufacturer, distributor, or Government agency, etc., that supplies the item.

(5) Part number column. Indicates the primary number used by the manufacturer (individual, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of item.

5. Special Information

a. Associated Publications. The publications listed below pertain to the R-390A/URR and its components:

TM 11-5820-358-10, Radio Receiver R-390A/URR
TM 11-5820-358-20, Radio Receiver R-390A/URR

b. Illustrations - Listing. The illustrations in this RPSTL are identical to those published in TM 11-5820-358-34P. Only those parts coded "C" or "O" in the third position of the SMR code are listed in the tabular listing; therefore, there may be a break in the item number sequence, figure number and page number. Only illustrations containing organizational or aviation unit authorized items appear in this RPSTL.

c. National Stock Numbers. National stock numbers (NSN's) that are missing from P source coded items have been applied for and will be added to this TM by future change/revision when they are entered in the Army Master Data File (AMDF). Until the NSN's are established and published, submit exception requisitions to: Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-LC-MM, fort Monmouth, NJ 07703-5000 for the part required to support your equipment.

6. How to Locate Repair Parts

a. When National stock number or part number is not known.

(1) First. Using the table of contents, determine the assembly group or subassembly group to which the item belongs. This is necessary since figures are prepared for assembly groups and subassembly groups, and listings are divided into the same groups.

(2) Second. Find the figure covering the assembly group or subassembly to which the item belongs.

(3) Third. Identify the items on the figure and note the item number.

(4) Fourth. Refer to the Repair Parts List for the figure to find the part number for the item number noted on the figure.

(5) Fifth. Refer to the Part Number Index to find the NSN, if assigned.

b. When National Stock Number or Part Number is Known.

(1) First. Using the Index of National stock numbers and part numbers, find the pertinent National Stock Number or Part Number. The NSN index is in National item identification number (NIIN) sequence (para 4a(1)). The part numbers in the part number index are listed in ascending alphameric sequence (para 4b). Both indexes cross-reference you to the illustration figure and item number of the item you are looking for.

(2) Second. After finding the figure and item number, verify that the item is the one you're looking for, then locate the item number in the repair parts list for the figure.

7. Abbreviations

Not applicable.

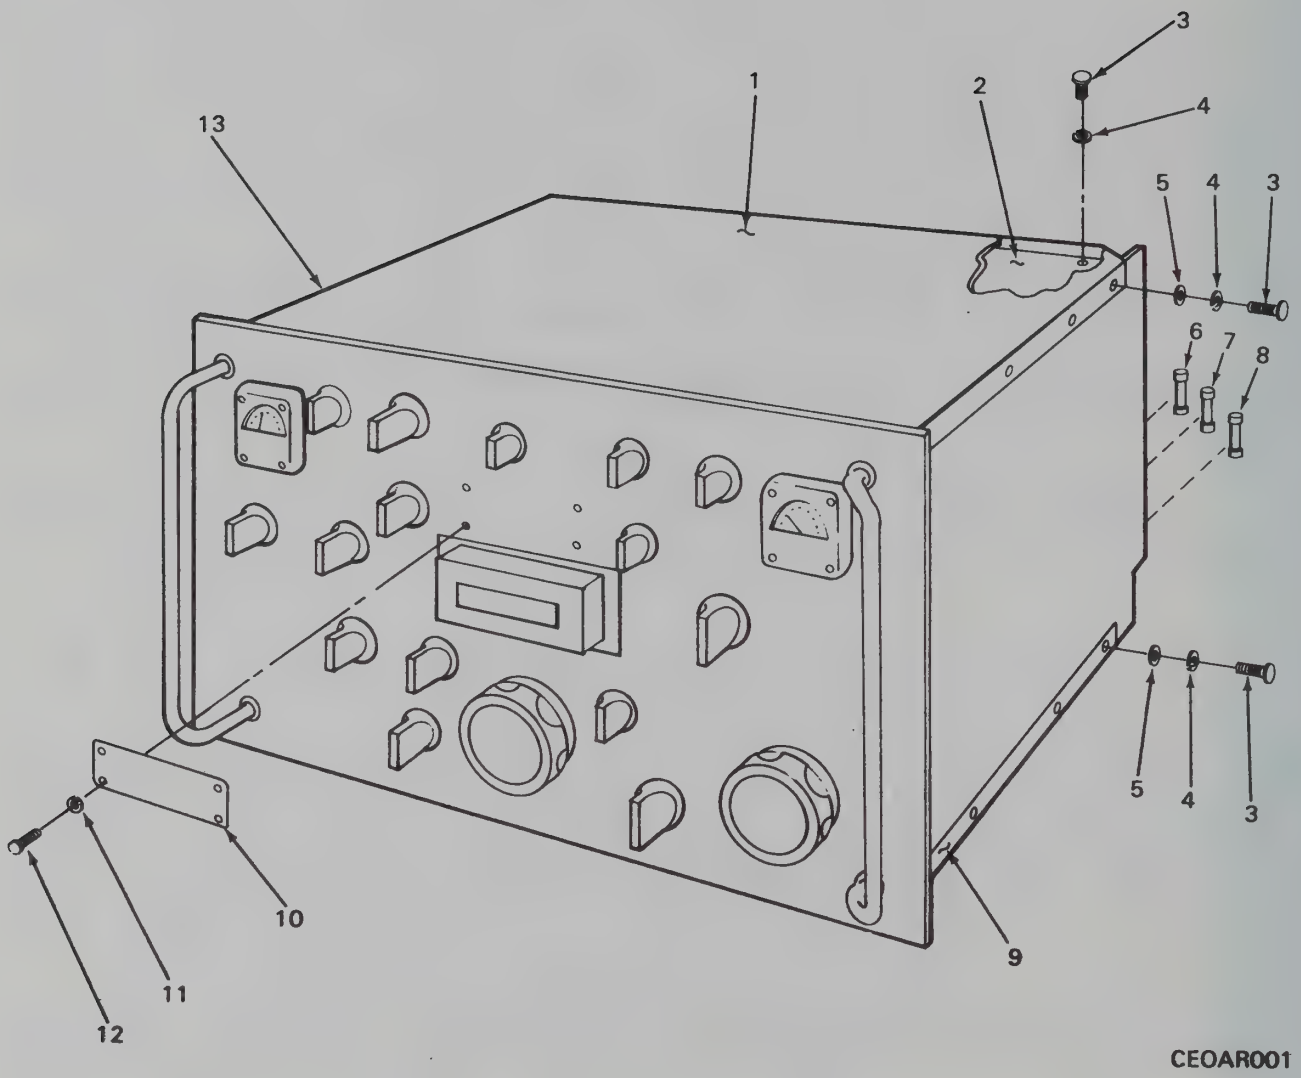

Figure 1. Radio Receiver R-390A/URR

(1) ITEM NO	(2) SMR CODE	(3) CAGEC	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODES(UOC)			(6) QTY
				GROUP 00 RADIO RECIEVER R-390A/URR			
				FIGURE 1			
6	PAOZZ	81349	F02B250V3A	FUSE,CARTRIDGE	F101	3 AMP.....	1
7	PAOZZ	81349	F02B250V1-4A	FUSE,CARTRIDGE	F102	1/4 AMP.....	1
8	PAOZZ	81349	F02A250V1-8AS	FUSE,CARTRIDGE	F103	1/8 AMP.....	1
				END OF FIGURE			

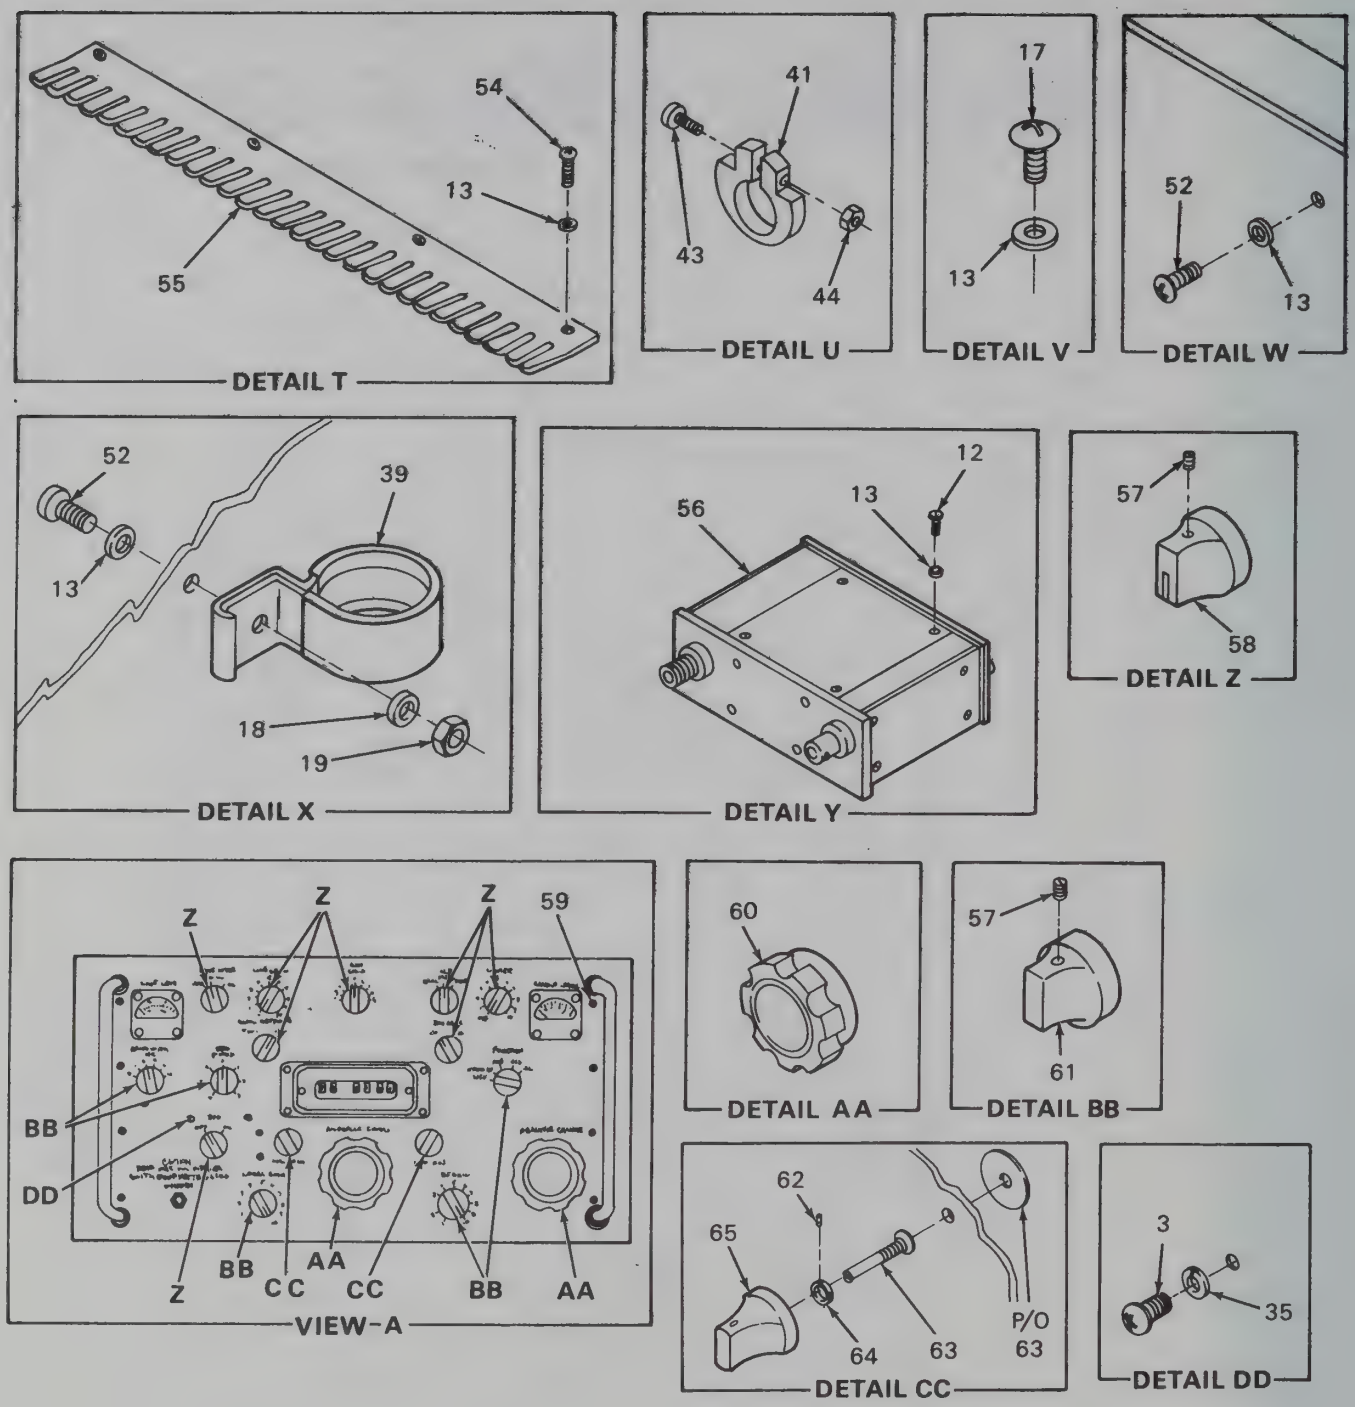

CEOAR004

Figure 2. Receiver Assembly (A1)

(1) ITEM NO	(2) SMR CODE	(3) CAGEC	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODES(UOC)	(6) QTY
				GROUP 01 RECIEVER ASSENBLY (A1)	
				FIGURE 2	
58	PAOZZ	80063	SM-B-249242-1	KNOB.....	8
60	PAOZZ	80063	SM-B-249243	KNOB.....	2
61	PAOZZ	80063	SM-B-249242-2	KNOB.....	5
65	PAOZZ	81183	15015	KNOB.....	2
				END OF FIGURE	

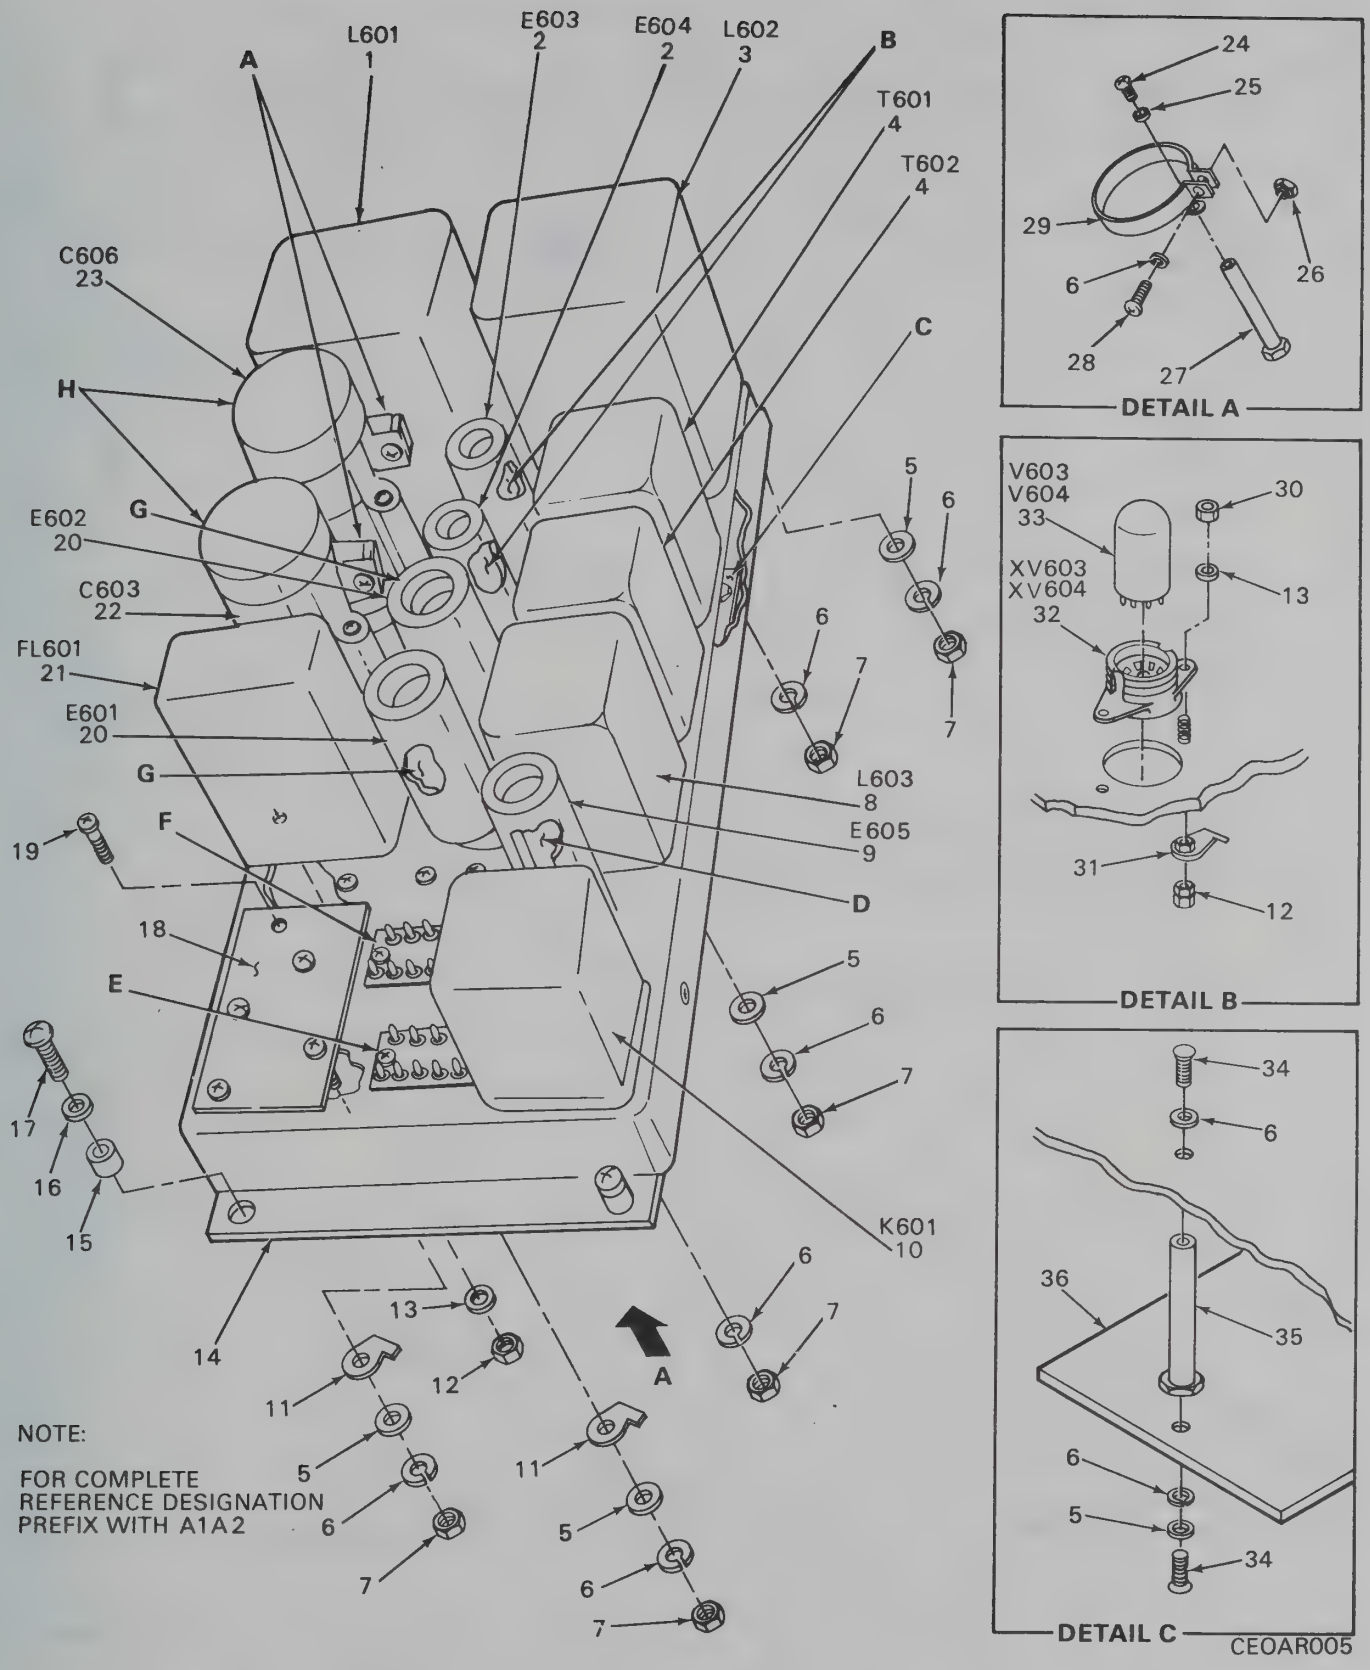

Figure 3. Audio Assembly (AF Subchassis) (A1A2) (Sheet 1 of 2)

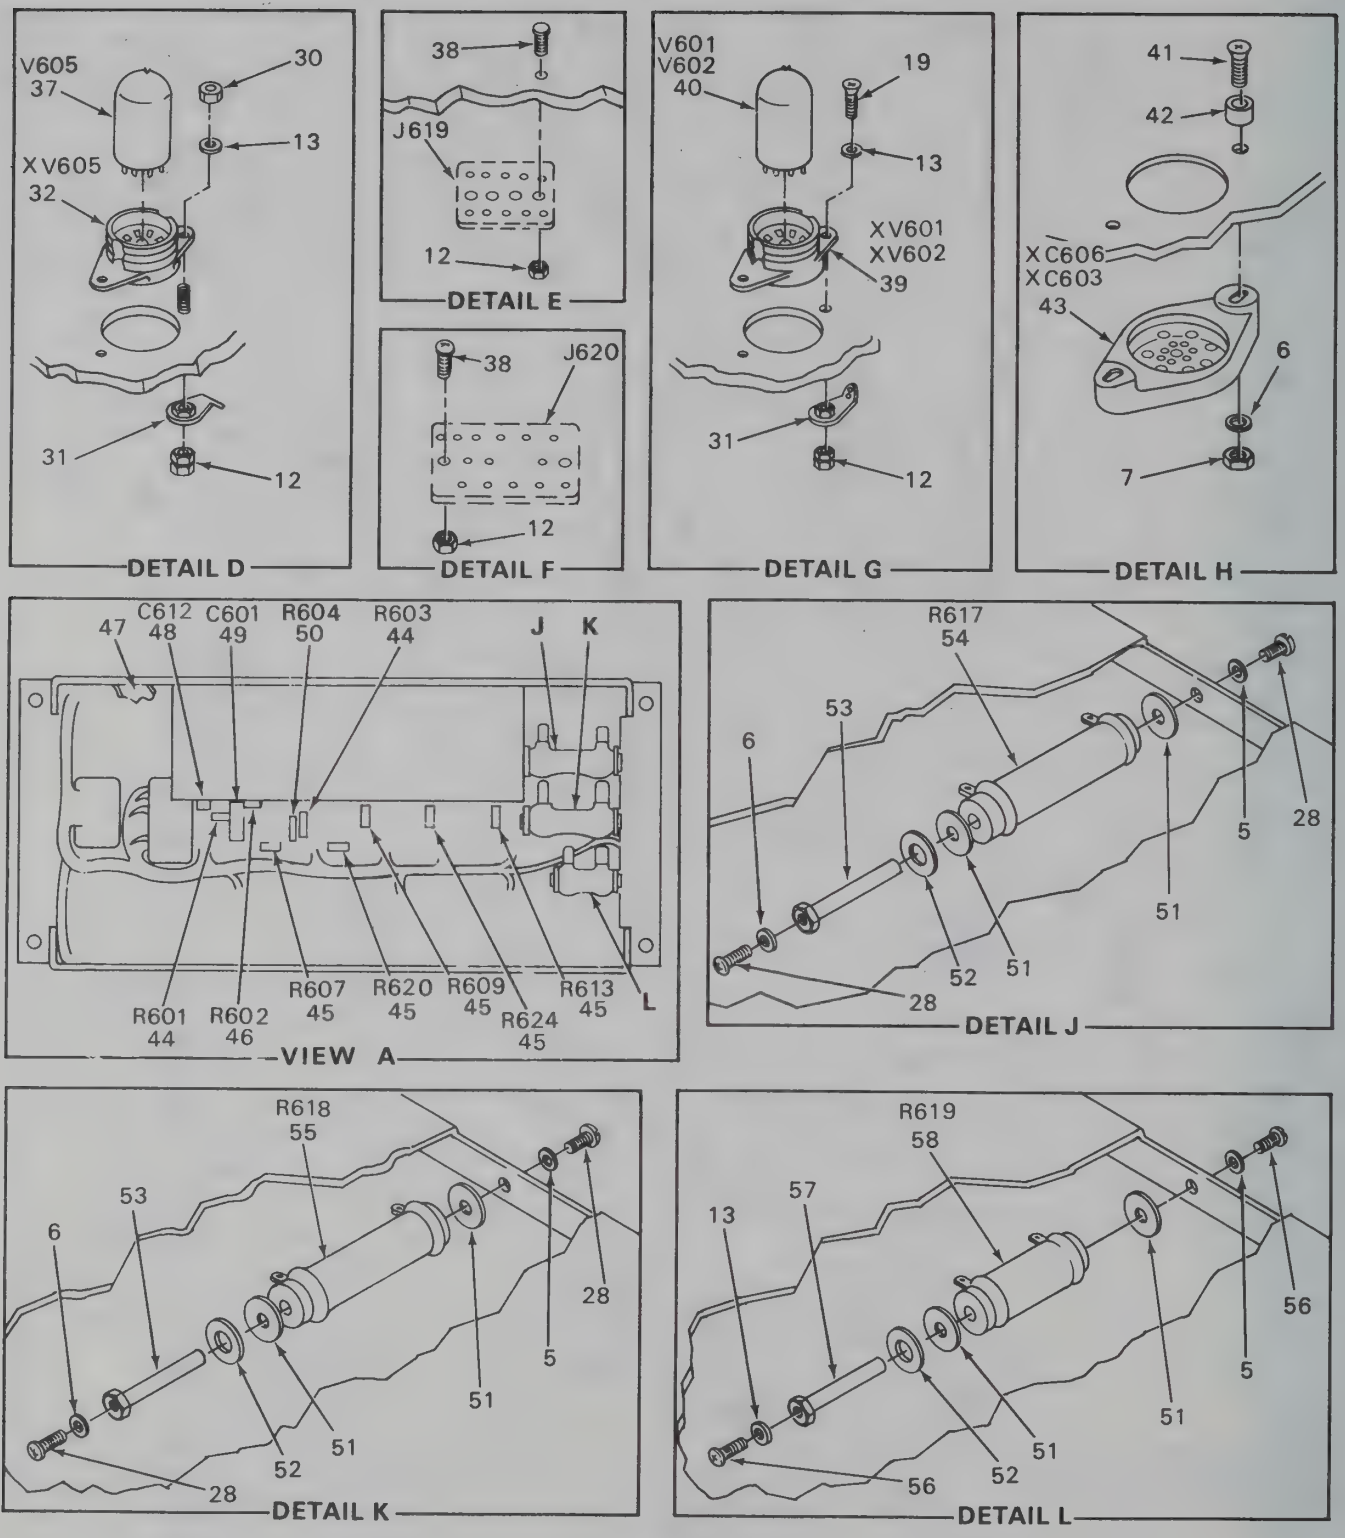

CEOAR006

Figure 3. Audio Assembly (AF Subchassis) (A1A2) (Sheet 2)

(1) ITEM NO	(2) SMR CODE	(3) CAGEC	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODES(UOC)	(6) QTY
				GROUP 0101 AUDIO ASSEMBLY (A1A2)	
				FIGURE 3	
2	PAOZZ	81349	M24251-6-2	SHIELD,ELECTRON TUB.....	2
20	PAOZZ	81349	M24251-5-5	SHIELD,ELECTRON TUB.....	2
33	PAOZZ	81349	6AK6	ELECTRON TUBE.....	2
37	PAOZZ	81349	0A2WA	ELECTRON TUBE.....	1
40	PAOZZ	81349	5814A	ELECTRON TUBE.....	2
				END OF FIGURE	

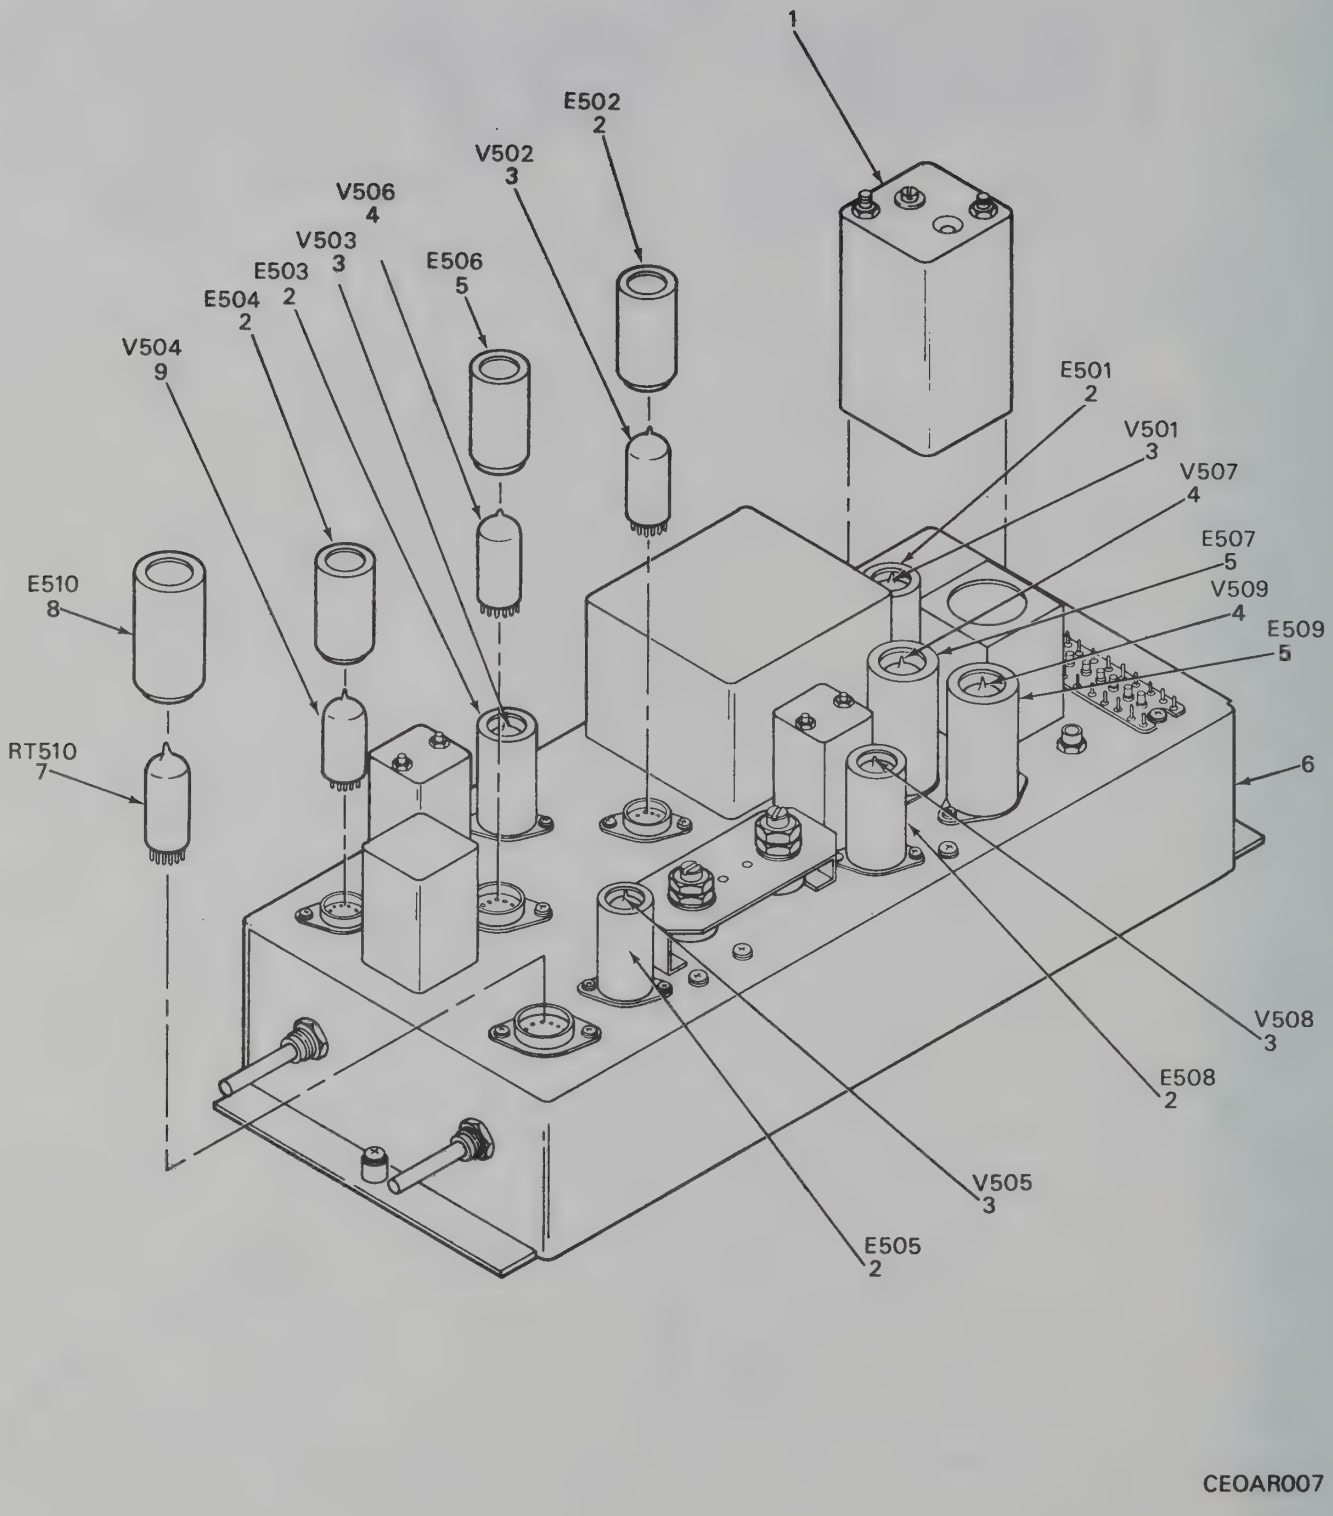

Figure 4. Amplifier Subassembly (A1A3)

(1) ITEM NO	(2) SMR CODE	(3) CAGEC	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODES(UOC)	(6) QTY
				GROUP 0102 AMPLIFIER SUBASSEMBLY (A1A3)	
				FIGURE 4	
1	XBOZZ	81349	CR45/U455-0000KC	CRYSTAL UNIT,QUARTZ.....	1
2	PAOZZ	81349	M24251-6-2	SHIELD,ELECTRON TUB.....	6
3	PAOZZ	81349	5749W	ELECTRON TUBE.....	5
4	PAOZZ	81349	5814A	ELECTRON TUBE.....	3
5	PAOZZ	81349	M24251-5-5	SHIELD,ELECTRON TUB.....	3
7	PAOZZ	70563	3TF7	RESISTOR,CURRENT RE.....	1
8	PAOZZ	81349	M24251-6-6	SHIELD,ELECTRON TUB.....	1
9	PAOZZ	81349	6AK6	ELECTRON TUBE.....	1
				END OF FIGURE	

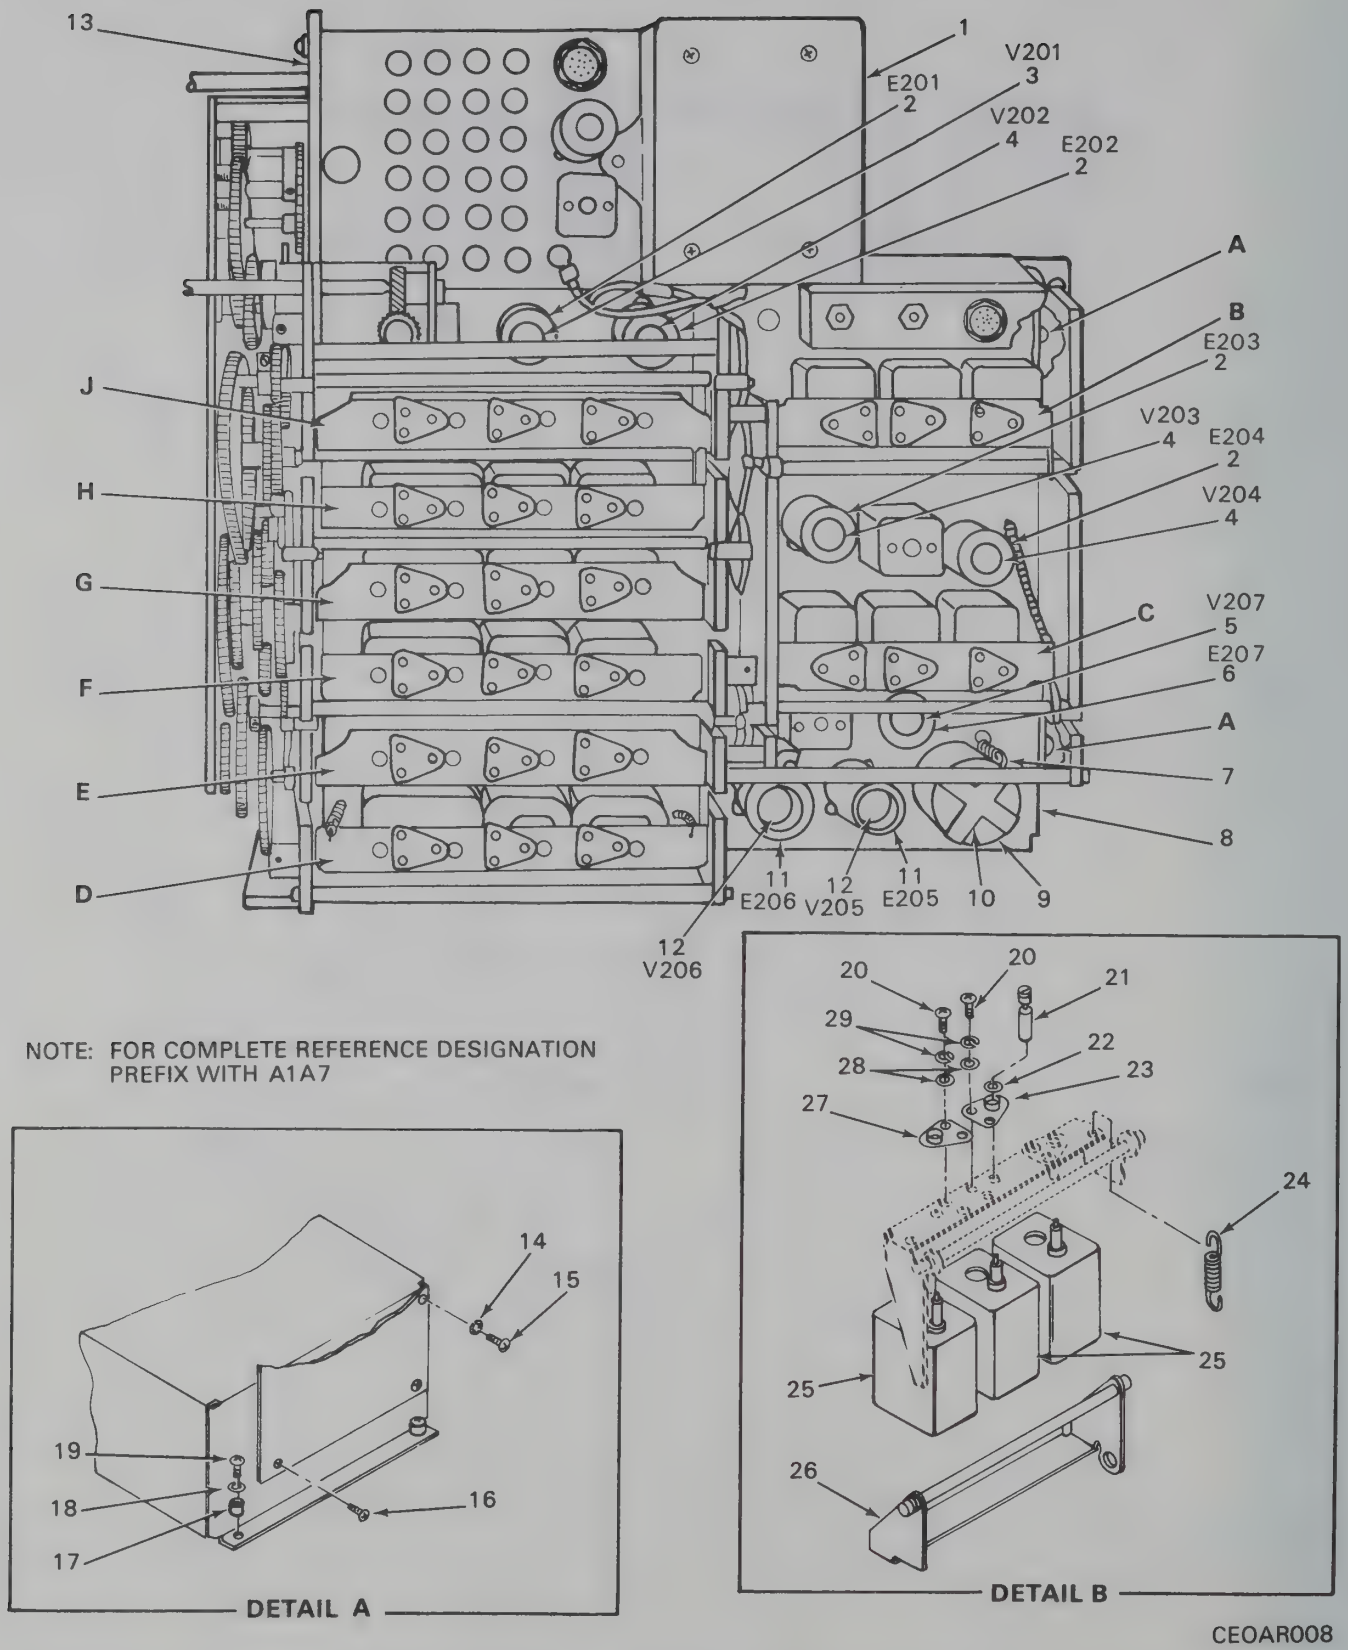

Figure 5. Amplifier, Radio Frequency (RF Subchassis) (A1A7)

(1) ITEM NO	(2) SMR CODE	(3) CAGEC	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODES(UOC)	(6) QTY
				GROUP 0103 AMPLIFIER RADIO FREQUENCY (A1A7)	
				FIGURE 5	
2	PAOZZ	81349	M24251-6-2	SHIELD,ELECTRON TUB.....	4
3	PAOZZ	13499	255-0226-000	ELECTRON TUBE.....	1
4	PAOZZ	81349	6C4	ELECTRON TUBE.....	3
5	PAOZZ	81349	5654W	ELECTRON TUBE.....	1
6	PAOZZ	81349	M24251-6-1	SHIELD,ELECTRON TUB.....	1
11	PAOZZ	81349	M24251-5-5	SHIELD,ELECTRON TUB.....	2
12	PAOZZ	81349	5814A	ELECTRON TUBE.....	2
				END OF FIGURE	

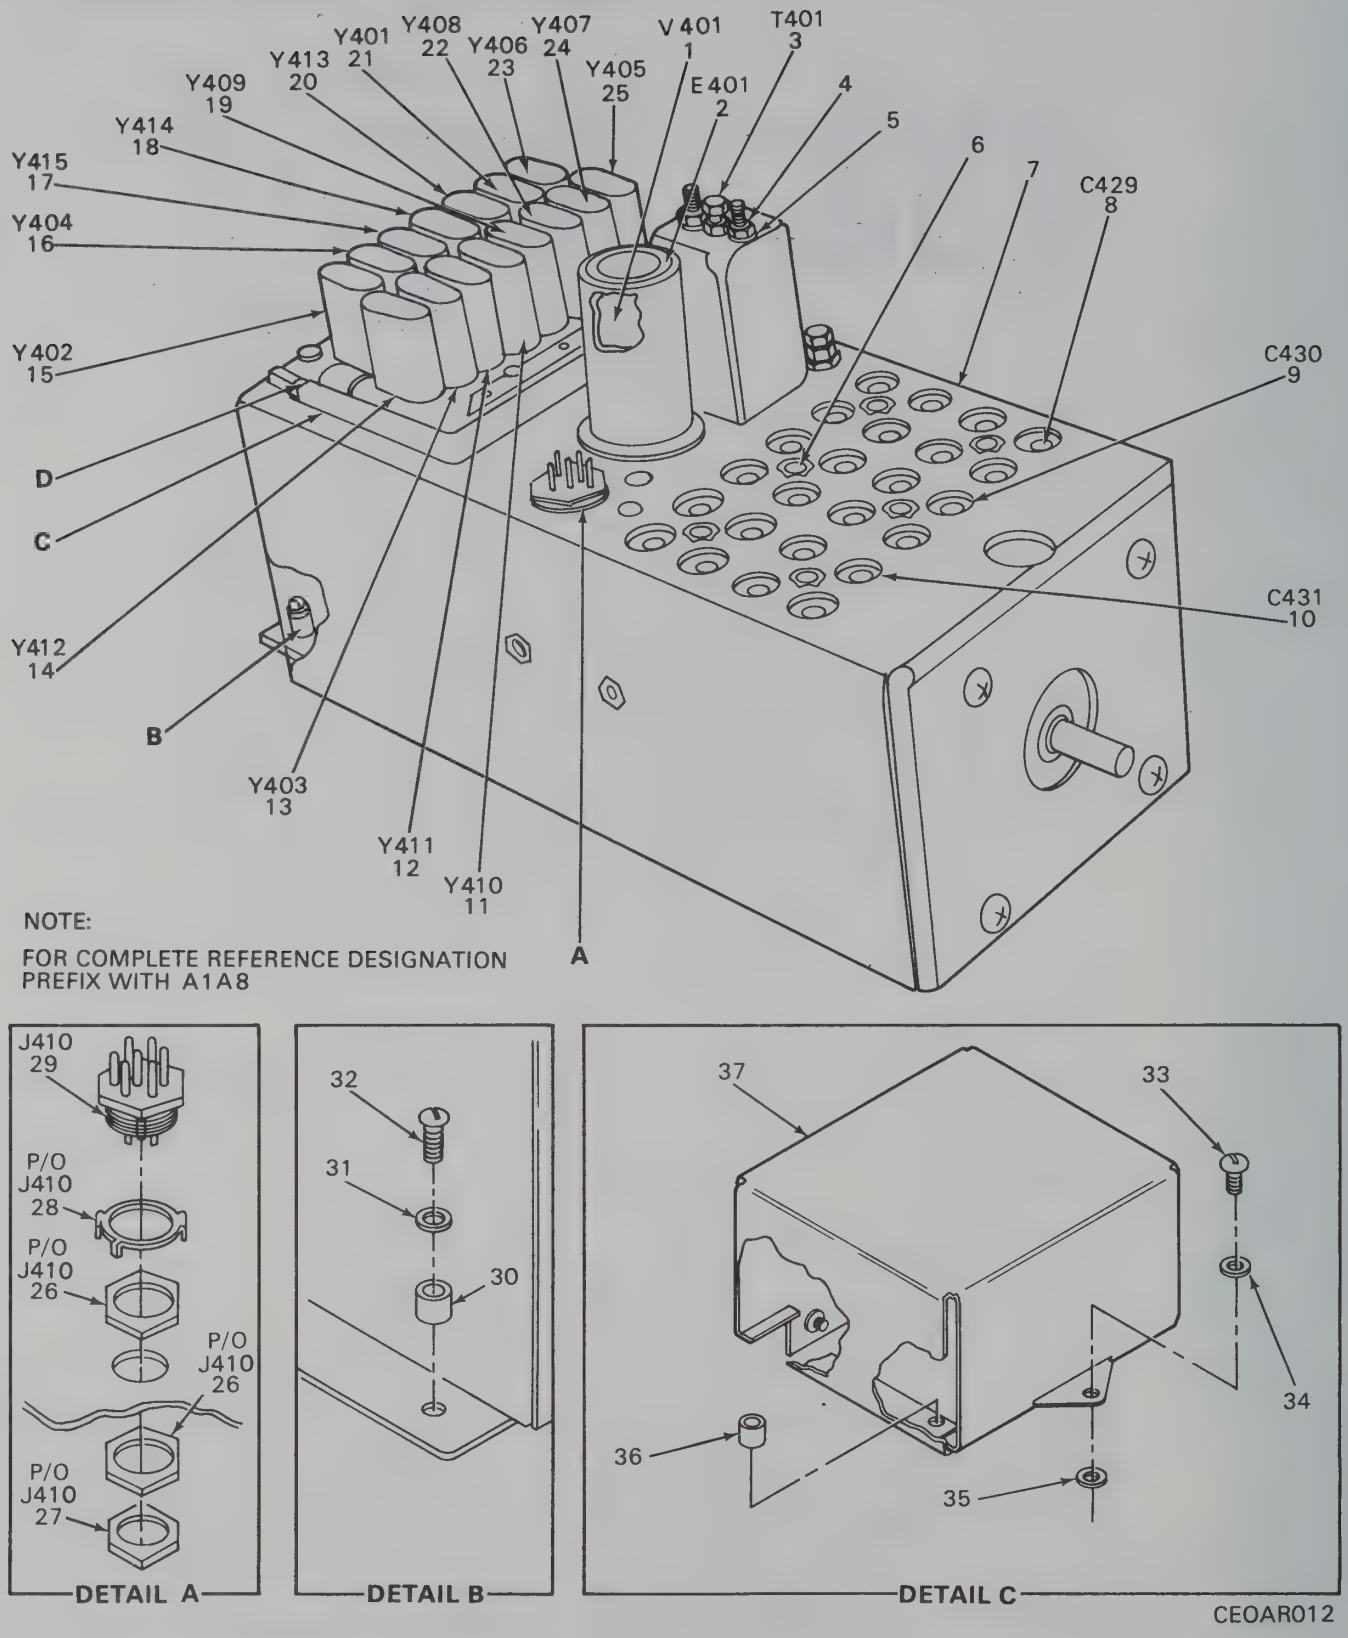

Figure 7. Oscillator Assembly (Crystal-Oscillator Subchassis) (A1A8)

(1) ITEM NO	(2) SMR CODE	(3) CAGEC	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODES(UOC)	(6) QTY
				GROUP 0104 OSCILLATOR ASSEMBLY (A1A8)	
				FIGURE 7	
1	PAOZZ	81349	5654W	ELECTRON TUBE.....	1
2	PAOZZ	81349	M24251-6-1	SHIELD,ELECTRON TUB.....	1
11	PAOZZ	81349	CR36/U14500KC	CRYSTAL UNIT,QUARTZ Y410.....	2
12	PAOZZ	81349	CR36/U16000KC	CRYSTAL UNIT,QUARTZ Y411.....	1
13	PAOZZ	81349	CR36/U11000KC	CRYSTAL UNIT,QUARTZ Y403.....	1
14	PAOZZ	81349	CR36/U17000KC	CRYSTAL UNIT,QUARTZ Y412.....	1
15	PAOZZ	81349	CR36/U10500KC	CRYSTAL UNIT,QUARTZ Y402.....	1
16	PAOZZ	81349	CR36/U11500KC	CRYSTAL UNIT,QUARTZ Y404.....	1
17	PAOZZ	81349	CR36/U15500KC	CRYSTAL UNIT,QUARTZ Y415.....	1
18	PAOZZ	81349	CR36/U15000KC	CRYSTAL UNIT,QUARTZ Y414.....	4
19	PAOZZ	81349	CR36/U14000KC	CRYSTAL UNIT,QUARTZ Y409.....	1
20	PAOZZ	81349	CR36/U9500KC	CRYSTAL UNIT,QUARTZ Y413.....	1
21	PAOZZ	81349	CR-36A/U10.000000MHZ	CRYSTAL UNIT,QUARTZ Y401.....	1
22	PAOZZ	81349	CR36/U9000KC	CRYSTAL UNIT,QUARTZ Y408.....	1
23	PAOZZ	81349	CR36/U12500KC	CRYSTAL UNIT,QUARTZ Y406.....	1
24	PAOZZ	81349	CR36/U13000KC	CRYSTAL UNIT,QUARTZ Y407.....	1
25	PAOZZ	81349	CR36/U12000KC	CRYSTAL UNIT,QUATRZ Y405.....	1
26	XAOZZ	XXXXX	XXXXXXX	NUT,PLAIN,HEXAGON (PART OF ITEM 29)	2
				END OF FIGURE	

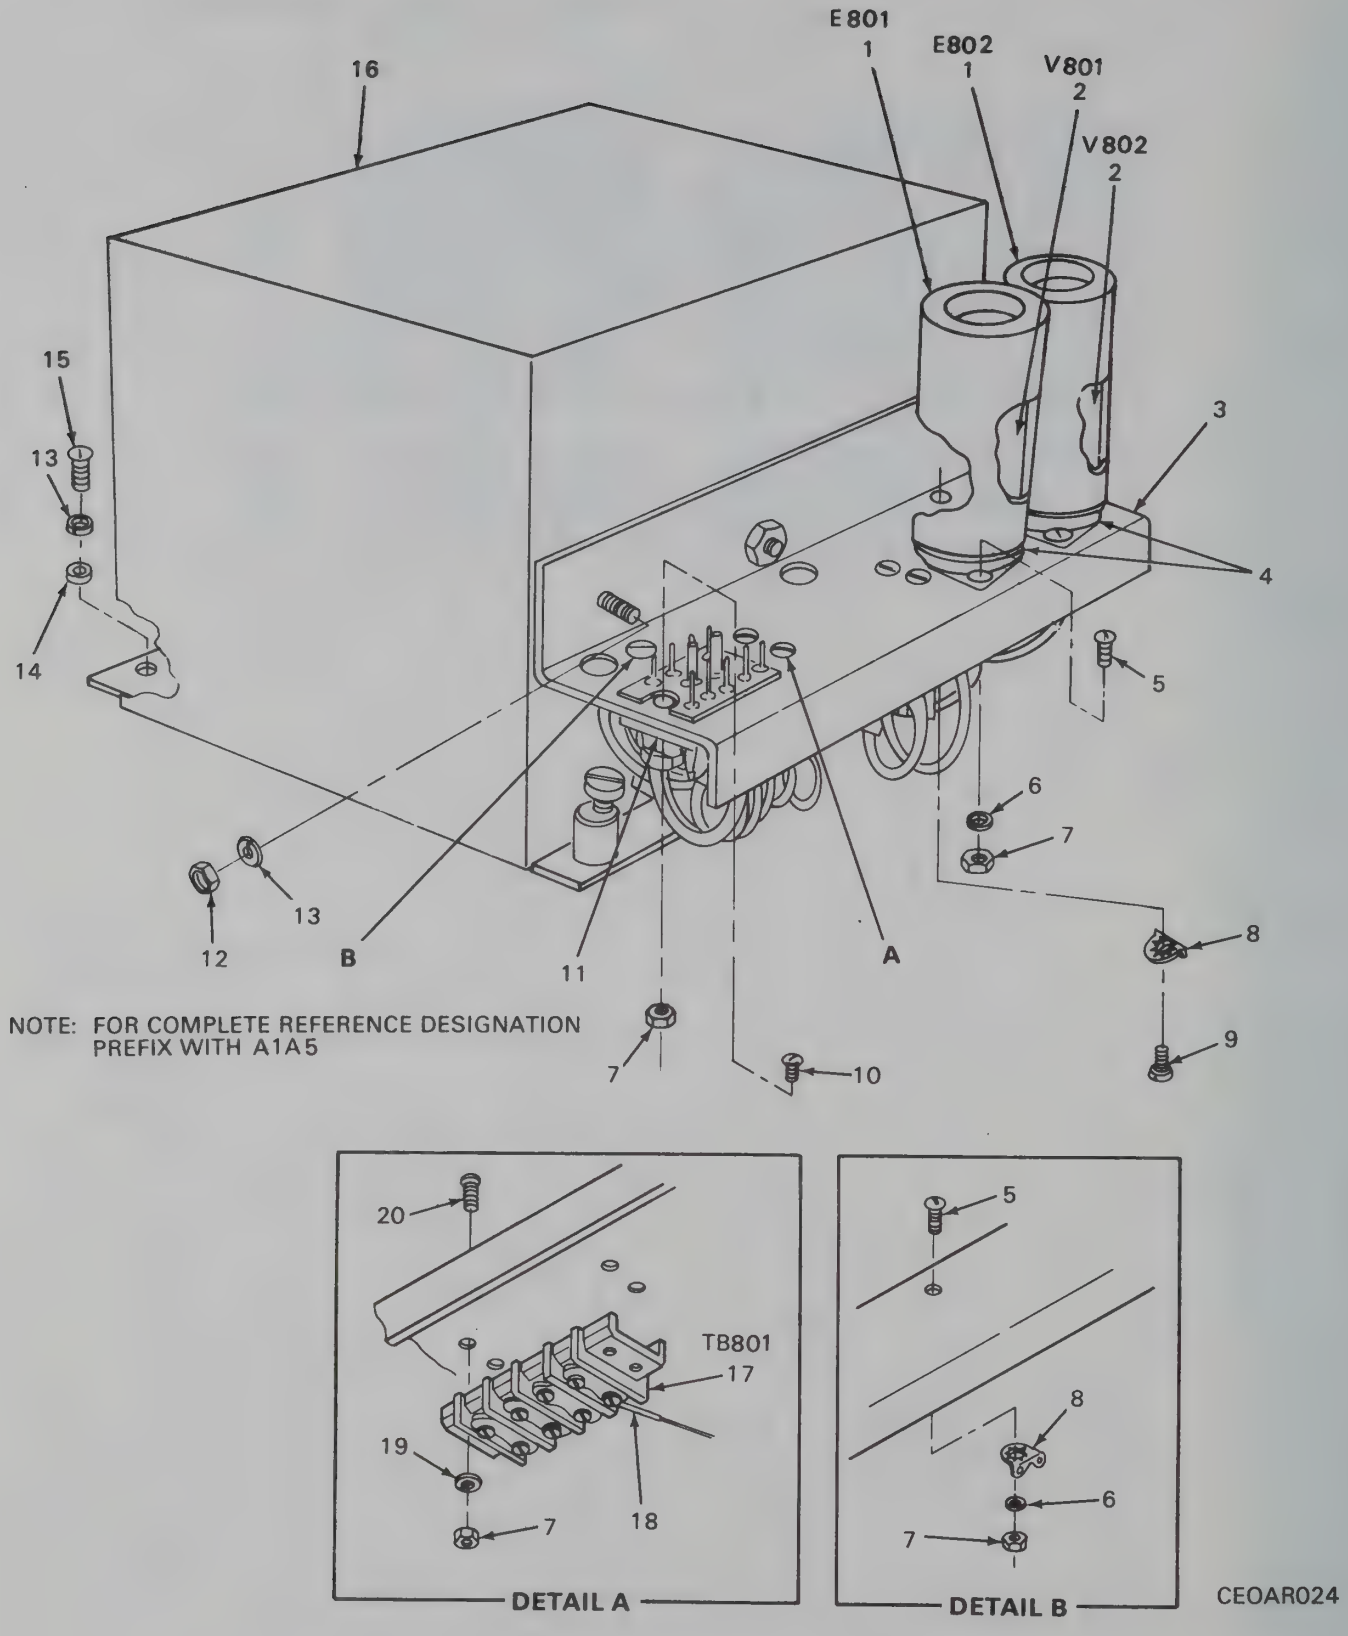

Figure 11. Power Supply (Power Supply Subchassis) (A1A5)

(1) ITEM NO	(2) SMR CODE	(3) CAGEC	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODES(UOC)	(6) QTY
				GROUP 0106 POWER SUPPLY (A1A5)	
				FIGURE 11	
1	PAOZZ	81349	M24251-5-5	SHIELD,ELECTRON TUB.....	2
2	PAOZZ	81349	26Z5W	ELECTRON TUBE.....	2
				END OF FIGURE	

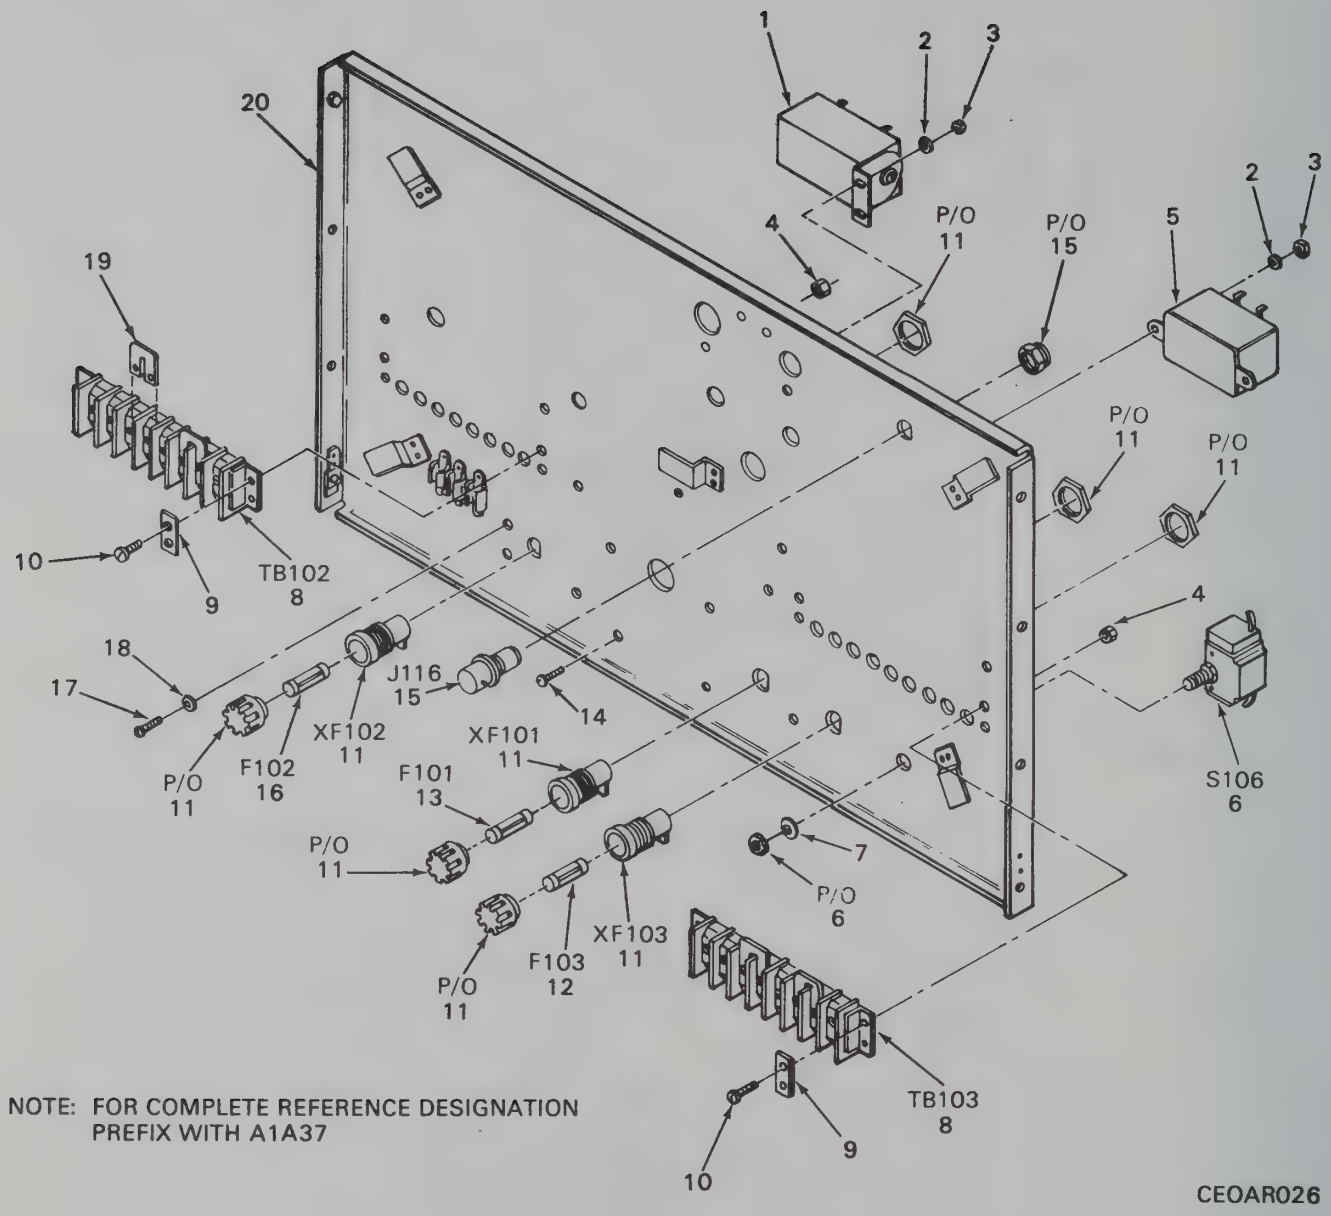

Figure 13. Panel Assembly (Chassis) (A1A37)

(1) ITEM NO	(2) SMR CODE	(3) CAGEC	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODES(UOC)	(6) QTY
				GROUP 0109 PANEL ASSEMBLY (CHASSIS) (A1A37)	
				FIGURE 13	
12	PAOZZ	81349	F02A250V1-8AS	FUSE,CARTRIDGE.....	1
13	PAOZZ	81349	F02D300B	FUSE,CARTRIDGE.....	1
16	PAOZZ	81349	F02B250V1-4A	FUSE,CARTRIDGE.....	1
				END OF FIGURE	

CROSS-REFERENCE INDEXES

NATIONAL STOCK NUMBER INDEX

STOCK NUMBER	FIG.	ITEM
5960-00-134-6004	4	3
5960-00-134-6031	5	5
	7	1
5960-00-188-3551	3	33
	4	9
5905-00-259-1964	4	7
5960-00-262-0210	3	40
	4	4
	5	12
5960-00-262-0221	11	2
5920-00-284-9493	1	8
	13	12
5960-00-503-4880	3	37
5920-00-504-8634	1	7
	13	16
5960-00-548-5068	5	3
5355-00-667-9338	2	58
	2	65
5960-00-856-8336	4	8
5960-00-858-5172	5	6
	7	2
5960-00-860-7709	3	2
	4	2
	5	2
5960-00-870-8262	3	20
	4	5
	5	11
	11	1
5955-00-889-3917	7	21
5920-01-028-5727	1	6
5355-01-151-1085	2	60
5355-01-166-3673	2	61

CROSS-REFERENCE INDEXES

PART NUMBER INDEX

CAGEC	PART NUMBER	STOCK NUMBER	FIG.	ITEM
81349	CR-36A/U10.00000 0MHZ	5955-00-889-3917	7	21
81349	CR36/U10500KC		7	15
81349	CR36/U11000KC		7	13
81349	CR36/U11500KC		7	16
81349	CR36/U12000KC		7	25
81349	CR36/U12500KC		7	23
81349	CR36/U13000KC		7	24
81349	CR36/U14000KC		7	19
81349	CR36/U14500KC		7	11
81349	CR36/U15000KC		7	18
81349	CR36/U15500KC		7	17
81349	CR36/U16000KC		7	12
81349	CR36/U17000KC		7	14
81349	CR36/U9000KC		7	22
81349	CR36/U9500KC		7	20
81349	CR45/U455-0000KC		4	1
81349	F02B250V3A	5920-01-028-5727	1	6
81349	F02A250V1-8AS	5920-00-284-9493	1	8
			13	12
81349	F02B250V1-4A	5920-00-504-8634	1	7
			13	16
81349	F02D300B		13	13
81349	M24251-5-5	5960-00-870-8262	3	20
			4	5
			5	11
			11	1
81349	M24251-6-1	5960-00-858-5172	5	6
			7	2
81349	M24251-6-2	5960-00-860-7709	3	2
			4	2
			5	2
81349	M24251-6-6	5960-00-856-8336	4	8
80063	SM-B-249242-1	5355-00-667-9338	2	58
80063	SM-B-249242-2	5355-01-166-3673	2	61
80063	SM-B-249243	5355-01-151-1085	2	60
XXXXX	XXXXXXX		7	26
81349	0A2WA	5960-00-503-4880	3	37
81183	15015	5355-00-667-9338	2	65
13499	255-0226-000	5960-00-548-5068	5	3
81349	26Z5W	5960-00-262-0221	11	2
70563	3TF7	5905-00-259-1964	4	7
81349	5654W	5960-00-134-6031	5	5
			7	1
81349	5749W	5960-00-134-6004	4	3
81349	5814A	5960-00-262-0210	3	40
			4	4
			5	12
81349	6AK6	5960-00-188-3551	3	33
			4	9
81349	6C4		5	4

CROSS-REFERENCE INDEXES

FIGURE AND ITEM NUMBER INDEX

FIG.	ITEM	STOCK NUMBER	CAGEC	PART NUMBER
1	6	5920-01-028-5727	81349	F02B250V3A
1	7	5920-00-504-8634	81349	F02B250V1-4A
1	8	5920-00-284-9493	81349	F02A250V1-8AS
2	58	5355-00-667-9338	80063	SM-B-249242-1
2	60	5355-01-151-1085	80063	SM-B-249243
2	61	5355-01-166-3673	80063	SM-B-249242-2
2	65	5355-00-667-9338	81183	15015
3	2	5960-00-860-7709	81349	M24251-6-2
3	20	5960-00-870-8262	81349	M24251-5-5
3	33	5960-00-188-3551	81349	6AK6
3	37	5960-00-503-4880	81349	0A2WA
3	40	5960-00-262-0210	81349	5814A
4	1		81349	CR45/U455-0000KC
4	2	5960-00-860-7709	81349	M24251-6-2
4	3	5960-00-134-6004	81349	5749W
4	4	5960-00-262-0210	81349	5814A
4	5	5960-00-870-8262	81349	M24251-5-5
4	7	5905-00-259-1964	70563	3TF7
4	8	5960-00-856-8336	81349	M24251-6-6
4	9	5960-00-188-3551	81349	6AK6
5	2	5960-00-860-7709	81349	M24251-6-2
5	3	5960-00-548-5068	13499	255-0226-000
5	4		81349	6C4
5	5	5960-00-134-6031	81349	5654W
5	6	5960-00-858-5172	81349	M24251-6-1
5	11	5960-00-870-8262	81349	M24251-5-5
5	12	5960-00-262-0210	81349	5814A
7	1	5960-00-134-6031	81349	5654W
7	2	5960-00-858-5172	81349	M24251-6-1
7	11		81349	CR36/U14500KC
7	12		81349	CR36/U16000KC
7	13		81349	CR36/U11000KC
7	14		81349	CR36/U17000KC
7	15		81349	CR36/U10500KC
7	16		81349	CR36/U11500KC
7	17		81349	CR36/U15500KC
7	18		81349	CR36/U15000KC
7	19		81349	CR36/U14000KC
7	20		81349	CR36/U9500KC
7	21	5955-00-889-3917	81349	CR-36A/U10.00000 0MHZ
7	22		81349	CR36/U9000KC
7	23		81349	CR36/U12500KC
7	24		81349	CR36/U13000KC
7	25		81349	CR36/U12000KC
7	26		XXXXX	XXXXXXX
11	1	5960-00-870-8262	81349	M24251-5-5
11	2	5960-00-262-0221	81349	26Z5W
13	12	5920-00-284-9493	81349	F02A250V1-8AS
13	13		81349	F02D300B
13	16	5920-00-504-8634	81349	F02B250V1-4A

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)
Commander
Stateside Army Depot
ATTN: AMSTA-US
Stateside, N.J. 07703-5007

DATE SENT
10 July 1975

PUBLICATION NUMBER	PUBLICATION DATE	PUBLICATION TITLE
TM 11-5840-340-20P	23 Jan 78	Radar Set AN/PRC-76

BE EXACT. PIN-POINT WHERE IT IS

PAGE NO	PARAGRAPH	FIGURE NO	TABLE NO
33			
44		19	
45			

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

For item 2, change the NSN to read: 5835-00-134-9186.
Reason: Accuracy.

Identify the cover on the junction box (item no. 5).
Reason: It is a separate item and is not called out on figure 19.

Add the cover of the junction box as an item in the listing for figure 19.
Reason: Same as above

SAMPLE

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER
SSG I. M. DeSpirit of 999-1776

SIGN HERE
I. M. DeSpirit

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS ARE OBSOLETE.

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS

TEAR ALONG PERFORATED LINE

TEAR ALONG PERFORATED LINE

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS MAIL PERMIT NO. 144 RED BANK, NJ

POSTAGE WILL BE PAID BY

Commander
US Army Communications-Electronics Command
and Fort Monmouth
ATTN: AMSEL-LC-ME-PS
Fort Monmouth, New Jersey 07703-9988

SAMPLE

FOLD BACK

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

THEN...JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT. FOLD IT AND DROP IT IN THE MAIL.

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS

DATE SENT

PUBLICATION NUMBER	PUBLICATION DATE	PUBLICATION TITLE
TM 11-5820-358-20P	1 Aug 1990	Radio Receiver R-390A/URR

BE EXACT PIN-POINT WHERE IT IS

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

PRINTED NAME GRADE OR TITLE AND TELEPHONE NUMBER

SIGN HERE

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS ARE OBSOLETE

P.S.—IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS

TEAR ALONG PERFORATED LINE

TEAR ALONG PERFORATED LINE

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS MAIL PERMIT NO. 144 RED BANK, NJ

POSTAGE WILL BE PAID BY

Commander
US Army Communications-Electronics Command
and Fort Monmouth
ATTN: AMSEL-LC-ME-PS
Fort Monmouth, New Jersey 07703-9988

FOLD BACK

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

THEN...JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT. FOLD IT AND DROP IT IN THE MAIL.

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS

DATE SENT

PUBLICATION NUMBER	PUBLICATION DATE	PUBLICATION TITLE
TM 11-5820-358-20P	1 Aug 1990	Radio Receiver R-390A/URR

BE EXACT PIN-POINT WHERE IT IS

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

PRINTED NAME GRADE OR TITLE AND TELEPHONE NUMBER

SIGN HERE

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS ARE OBSOLETE

P.S.—IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS

TEAR ALONG PERFORATED LINE

TEAR ALONG PERFORATED LINE

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS MAIL PERMIT NO. 144 RED BANK, NJ

POSTAGE WILL BE PAID BY

Commander
US Army Communications-Electronics Command
and Fort Monmouth
ATTN: AMSEL-LC-ME-PS
Fort Monmouth, New Jersey 07703-9988

FOLD BACK

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

THEN...JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT. FOLD IT AND DROP IT IN THE MAIL.

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS

DATE SENT

PUBLICATION NUMBER	PUBLICATION DATE	PUBLICATION TITLE
TM 11-5820-358-20P	1 Aug 1990	Radio Receiver R-390A/URR

BE EXACT PIN-POINT WHERE IT IS

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

PRINTED NAME GRADE OR TITLE AND TELEPHONE NUMBER

SIGN HERE

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS ARE OBSOLETE

P.S.—IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS

TEAR ALONG PERFORATED LINE

TEAR ALONG PERFORATED LINE

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS MAIL PERMIT NO. 144 RED BANK, NJ

POSTAGE WILL BE PAID BY

Commander
US Army Communications-Electronics Command
and Fort Monmouth
ATTN: AMSEL-LC-ME-PS
Fort Monmouth, New Jersey 07703-9988

FOLD BACK

By Order of the Secretary of the Army:

CARL E. VUONO
General, United States Army
Chief of Staff

Official:

THOMAS F. SIKORA
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION:
To be distributed in accordance with DA Form 12-51 unit requirements for R-390A/URR.

☆U.S. GOVERNMENT PRINTING OFFICE: 1990 - 712-094/20456

PIN: 006392-000